


Equal Leg Channel

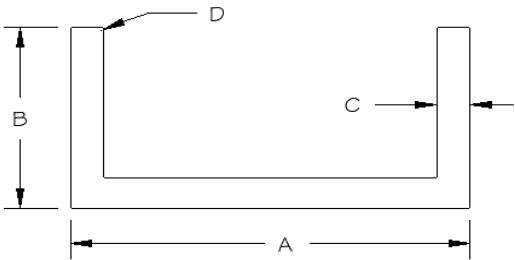


See Profile Drawing - (*)

	DIE NO.	A	B	C	D	WT/FT
*	2000	1.270	0.500	0.125	Full Radius	0.293
	2051	1.500	0.625	0.080	0.010	0.248
*	1943	1.580	0.790	0.040	Full Radius	0.148
	2762	1.610	0.687	0.055	0.015	0.188
	2760	1.624	0.812	0.062	0.010	0.232
	3455	2.000	2.000	0.188	0.012	0.268
	1942	2.050	0.625	0.040	0.010	0.158
	3501	2.500	1.500	0.125	0.015	0.787
	3726	3.000	1.500	0.190	0.010	0.282
*	3502	3.530	2.250	0.250	Full Radius	2.234
	3549	4.000	2.000	0.188	0.015	1.720
*	3818	4.750	1.625	0.375	0.016	3.294
	3550	5.000	1.500	0.125	0.010	1.020

Aluminum Association Standard commercial Tolerances for extruded rod, bar, and shapes apply unless otherwise noted.

Jordan Aluminum Company
 PO Box 752268
 Memphis, TN
 38175-2268
 TF: 800.883.4590
 PH: 901.866.2665
 FX: 901.363.8226

Rectangle Bar

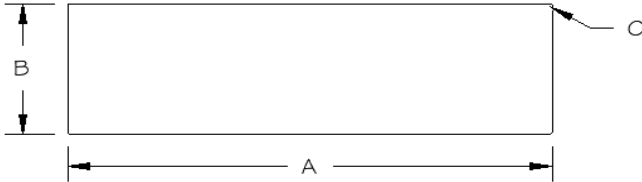

See Profile Drawing - (*)


DIE NO.	A	B	C	WT/FT
2598	0.375	0.250	0.010	0.112
3520	0.750	0.078	0.010	0.070
2494	0.750	0.125	0.010	0.113
2666	0.750	0.250	0.010	0.226
1351	0.937	0.250	0.016	0.375
2496	1.000	0.125	0.010	0.150
3671	1.250	0.375	0.010	0.563
1562	1.500	0.125	0.010	0.226
3450	1.500	0.188	0.010	0.338
3736	1.500	0.250	0.010	0.450
3662	1.500	0.375	0.016	0.676
2696	1.500	0.188	0.063	0.335
* 3020	1.500	0.062	Full Radius	0.110
3591	1.625	0.250	0.015	0.487
1480	2.000	0.125	0.010	0.300
3141	2.000	0.250	0.010	0.600
3500	2.000	0.375	0.015	0.900
* 2580	2.000	0.500	Full Radius	1.135
2731	2.000	0.188	0.063	0.448
3810	2.000	1.000	0.010	2.400
1481	2.500	0.125	0.010	0.376
1482	3.000	0.125	0.010	0.450
2597	3.000	0.250	0.010	0.900
1483	3.500	0.125	0.010	0.524
3521	4.000	0.062	0.010	0.298
1484	4.000	0.125	0.010	0.600
3730	4.000	0.188	0.015	0.902
1548	4.000	0.250	0.010	1.200
1592	4.500	0.125	0.010	0.676
3858	6.000	0.500	0.016	3.600

Aluminum Association Standard commercial Tolerances for extruded rod, bar, and shapes apply unless otherwise noted.

Jordan Aluminum Company

PO Box 752268
Memphis, TN
38175-2268
TF: 800.883.4590
PH: 901.866.2665
FX: 901.363.8226

Rectangle Tube

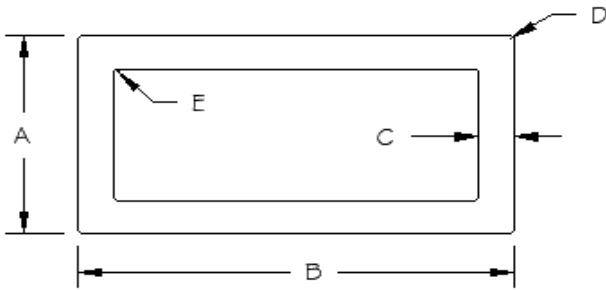

See Profile Drawing - (*)


DIE NO.	A	B	C	D	E	WT/FT	
2186	0.938	1.438	0.040	0.156	0.116	0.209	
1380	1.000	1.250	0.085	0.062	0.031	0.421	
2861	1.000	1.500	0.050	0.010	0.010	0.288	
1514	1.000	1.500	0.062	0.125	0.063	0.342	
2216	1.000	2.000	0.040	0.125	0.085	0.272	
1515	1.000	2.000	0.620	0.125	0.063	0.416	
2507	1.000	2.000	0.085	0.125	0.125	0.578	
2520	1.000	2.000	0.100	0.125	0.125	0.672	
2514	1.000	2.000	0.100	0.010	0.010	0.672	
*	3454	1.000	2.000	0.094/0.070	0.015	0.062	0.534
3820	1.000	3.000	0.250	0.250	0.062	2.039	
3735	1.250	1.704	0.065	0.125	0.060	0.428	
3785	1.500	1.750	0.070	0.050	0.050	0.522	
3583	1.500	2.000	0.125	0.140	0.031	0.955	
3541	1.500	3.000	0.125	0.140	0.031	1.255	
3821	1.500	3.000	0.250	0.250	0.062	2.339	
2475	1.500	4.000	0.125	0.125	0.016	1.559	
3542	1.750	4.000	0.125	0.140	0.031	1.631	
3492	2.000	3.000	0.188	0.250	0.250	2.086	
3493	2.000	4.000	0.125	0.250	0.250	1.724	
3494	2.000	4.000	0.250	0.250	0.250	3.299	
5212	2.000	4.000	0.125	0.010	0.010	1.724	
5213	2.000	6.000	0.125	0.010	0.010	2.324	
5214	2.000	8.000	0.125	0.010	0.010	2.924	
5215	2.000	10.000	0.125	0.010	0.010	3.524	
3495	3.000	4.000	0.250	0.250	0.250	3.899	

Aluminum Association Standard
commercial Tolerances for
extruded rod, bar, and shapes
apply unless otherwise noted.

Jordan Aluminum Company

PO Box 752268
Memphis, TN
38175-2268
TF: 800.883.4590
PH: 901.866.2665
FX: 901.363.8226

Round Tube

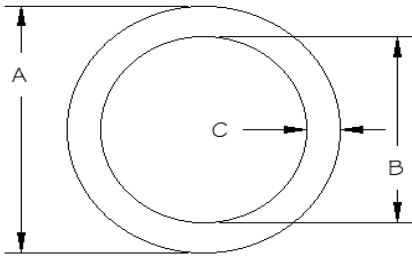

DIE NO.	A	B	C	WT/FT
3673	0.375	0.251	0.062	0.072
1947	0.500	0.400	0.050	0.084
1949	0.500	0.324	0.088	0.137
2845	0.500	0.400	0.050	0.084
2844	0.625	0.525	0.050	0.109
2408	0.750	0.630	0.060	0.156
2581	0.750	0.620	0.065	0.168
2661	0.750	0.500	0.125	0.295
3171	0.750	0.650	0.050	0.132
2849	0.875	0.745	0.065	0.198
2914	0.875	0.775	0.050	0.155
2497	1.000	0.890	0.055	0.196
2619	1.000	0.750	0.125	0.413
2848	1.000	0.870	0.065	0.228
2934	1.000	0.900	0.050	0.179
2842	1.125	0.995	0.065	0.259
2902	1.125	0.925	0.100	0.386
2742	1.250	1.000	0.125	0.530
3695	1.500	1.250	0.125	0.647
2894	1.510	1.410	0.050	0.275
3731	1.625	1.475	0.075	0.438
1549	1.660	1.380	0.140	0.786
2893	1.825	1.705	0.060	0.399
1550	1.900	1.500	0.200	1.256
1545	1.900	1.610	0.145	0.940
2892	2.000	1.880	0.060	0.439
3346	3.070	2.930	0.070	0.791

Aluminum Association Standard commercial Tolerances for extruded rod, bar, and shapes apply unless otherwise noted.

Jordan Aluminum Company
 PO Box 752268
 Memphis, TN
 38175-2268
 TF: 800.883.4590
 PH: 901.866.2665
 FX: 901.363.8226

