


Rectangle Bar

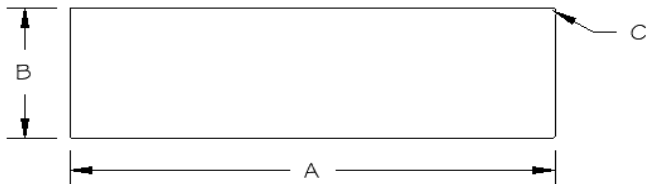


See Profile Drawing - (*)

DIE NO.	A	B	C (Radius)	WT/FT
2494	0.750	0.125	0.010	0.113
2496	1.000	0.125	0.010	0.150
3810	1.000	2.000	0.010	2.400
3671	1.250	0.375	0.010	0.563
3736	1.500	0.250	0.010	0.450
3662	1.500	0.375	0.016	0.676
1480	2.000	0.125	0.010	0.300
3141	2.000	0.250	0.010	0.600
3500	2.000	0.375	0.015	0.900
1481	2.500	0.125	0.010	0.376
2597	3.000	0.250	0.010	0.900
3730	4.000	0.188	0.015	0.902
1548	4.000	0.250	0.010	1.200
2731		2.000	0.063	0.448

Aluminum Association Standard commercial Tolerances for extruded rod, bar, and shapes apply unless otherwise noted.

Jordan Aluminum Company
PO Box 752268
Memphis, TN 38175-2268
TF: 800.883.4590
PH: 901.866.2665
FX: 901.363.8226

Rectangle Tube

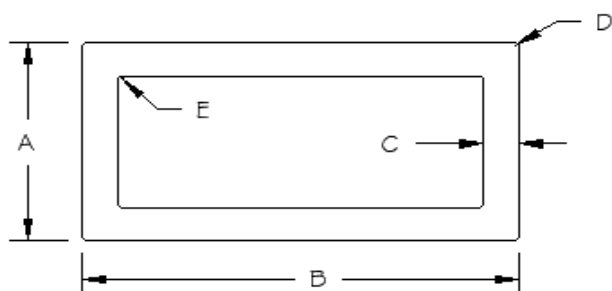

See Profile Drawing - (*)


DIE NO.	A	B	C (Wall)	D	E	WT/FT
* 3454	1.000	2.000	.094/.070			0.534
1380	1.000	1.250	0.085	0.062		0.421
1514	1.000	1.500	0.062	0.125		0.342
2861	1.000	1.500	0.050	0.010		0.288
1515	1.000	2.000	0.062	0.125		0.416
2322	1.000	2.000	0.125	0.125		0.826
2507	1.000	2.000	0.085	0.125		0.578
2514	1.000	2.000	0.100			0.672
2520	1.000	2.000	0.100	0.125		0.672
3735	1.250	1.704	0.065	0.125		0.428
3785	1.500	1.750	0.070	0.050		0.522
3583	1.500	2.000	0.125	0.140		0.955
3541	1.500	3.000	0.125	0.140		1.255
2475	1.500	4.000	0.125	0.125		1.559
3542	1.750	4.000	0.125	0.140		1.631
5553	2.000	1.000	0.100	0.062		0.683
5626	2.000	1.000	0.120	0.015		0.779
5691	2.000	1.000	0.090	0.125		0.594
5729	2.000	1.000	0.125	0.015		0.824
3492	2.000	3.000	0.188	0.250		2.086
3493	2.000	4.000	0.125	0.250		1.724
3494	2.000	4.000	0.250	0.250		3.299
5628	3.000	1.500	0.120	0.031		1.226
5444	3.000	2.000	0.125	0.015		1.424
3495	3.000	4.000	0.250	0.250		3.899
5443	4.000	1.000	0.125	0.015		1.424
5212	4.000	2.000	0.125	0.010		1.724
5213	6.000	2.000	0.125	0.010		2.324
5214	8.000	2.000	0.125	0.010		2.924
5215	10.000	2.000	0.125	0.010		3.524

Aluminum Association Standard
commercial Tolerances for
extruded rod, bar, and shapes
apply unless otherwise noted.

Jordan Aluminum Company

PO Box 752268
Memphis, TN
38175-2268
TF: 800.883.4590
PH: 901.866.2665
FX: 901.363.8226

Square Tube

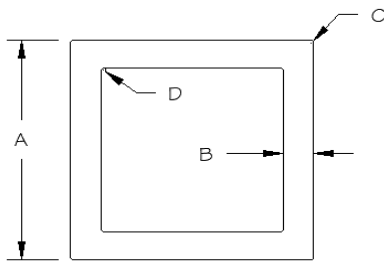

DIE NO.	A	B (Wall)	C (Radius)	D	WT/FT
3659	0.970	0.050	0.094		0.228
1644	0.500	0.090	0.015		0.178
1921	0.750	0.062	0.016		0.205
2860	0.750	0.045	0.063		0.151
3732	0.750	0.062	0.093		0.197
1959	0.938	0.156			0.134
2162	0.938	0.054	0.156		0.215
3451	0.950	0.050	0.094		0.223
1189	1.000	0.062	0.125		0.268
1919	1.000	0.040			0.185
1920	1.000	0.100	0.062		0.428
1944	1.000	0.075	0.125		0.319
2209	1.000	0.053	0.015		0.242
5454	1.000	0.125	0.015		0.524
5586	1.000	0.062	0.015		0.280
5587	1.000	0.093	0.125		0.392
2618	1.000	0.125	0.125		0.509
3733	1.220	0.125	0.125		0.641
2614	1.250	0.125	0.010		0.676
3184	1.250	0.100	0.060		0.548
3460	1.250	0.090	0.125		0.485
3539	1.250	0.065	0.187		0.348
3658	1.250	0.125	0.016		0.659
3508	1.375	0.062	0.125		0.378
1912	1.500	0.062	0.125		0.416
2166	1.500	0.040	0.015		0.281
3540	1.500	0.125	0.140		0.804
3734	1.500	0.080	0.125		0.534
3804	1.500	0.188	0.125		1.184
5453	1.500	0.125	0.015		0.824
5627	1.500	0.125	0.125		0.809
5690	1.500	0.090	0.016		0.610
1643	1.750	0.125	0.010		0.976
1642	2.000	0.125	0.010		1.126
5536	2.000	0.125	0.125		1.110
5538	2.000	0.188	0.032		1.634
1849	2.188	0.188	0.010		1.805
2712	2.250	0.125	0.010		1.276
5539	2.250	0.125	0.032		1.424
3496	2.500	0.250	0.125		2.700
3674	3.000	0.235	0.250		3.070
5445	3.000	0.125	0.015		1.724
5446	4.000	0.125	0.015		2.324
5211	6.000	0.125	0.010		3.524

Aluminum Association Standard
commercial Tolerances for
extruded rod, bar, and shapes
apply unless otherwise noted.

Jordan Aluminum Company

PO Box 752268
Memphis, TN
38175-2268
TF: 800.883.4590
PH: 901.866.2665
FX: 901.363.8226